




TOROID-SERIES-Fly Leads 30VA to 160VA



Dimensional drawing

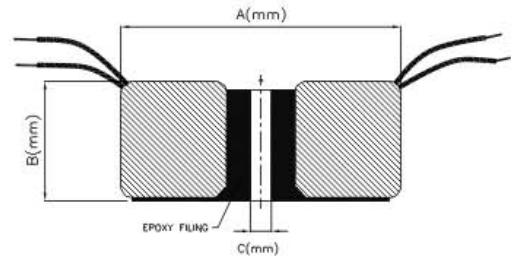

Specifications:

Dual Primary: 115 / 230V @ 50 / 60Hz

Dual Secondary: 9 / 18V

Power: 30VA to 160VA

Dielectric Strength: 2500Vrms

Agency Standards

Class B Insulation(130 Degree C)


Built to meet CAN / CSA E60065-94

Built to meet UL1411

Built to meet IEC60065

Standard samples will be despatched within 24 hours of receiving order.

Kindly indicate the part number while inquiring.

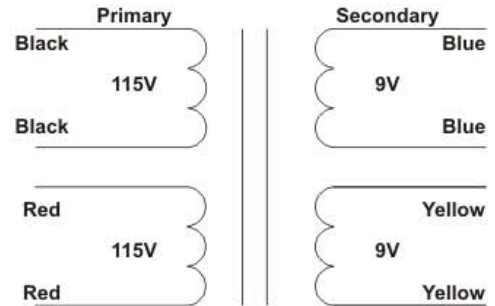

Technical Data:

Part Number	VA (Size)	Secondary		Mechanical Dimensions (mm)			Weight (KG)
		Series Connected	Parallel Connected	A	B	C	
S-TR901-0030	30	18V CT @ 1.66A 230V CT	9V @ 3.32A 115V	70	35	5	0.45
S-TR902-0040	40	18V CT @ 2.22A 230V CT	9V @ 4.44A 115V	75	40	5	0.57
S-TR903-0050	50	18V CT @ 2.77A 230V CT	9V @ 5.54A 115V	80	45	5	0.74
S-TR904-0075	75	18V CT @ 4.16A 230V CT	9V @ 8.32A 115V	90	45	6	1.00
S-TR905-0080	80	18V CT @ 4.44A 230V CT	9V @ 8.88A 115V	95	45	6	1.10
S-TR906-0100	100	18V CT @ 5.55A 230V CT	9V @ 11.10A 115V	100	50	6	1.35
S-TR907-0160	160	18V CT @ 8.88A 230V CT	9V @ 17.76A 115V	105	60	6	1.72

Custom made transformers are available on request.



SHILCHAR
TECHNOLOGIES LIMITED



ISO 9002
File No. A13342